

WL-25RS395 DC SPUR GEAR MOTOR

基本电压/Main voltage :12VDC、24VDC


典型应用/Typical applications :

仪器仪表、电动工具、咖啡机、自动售卖机、按摩器、游戏机、
推窗器、自动化设备

Instrument, Electric tools, Coffee machine,

Vending machine, Massager, Game machine,

Electric window opener, Automation equipment

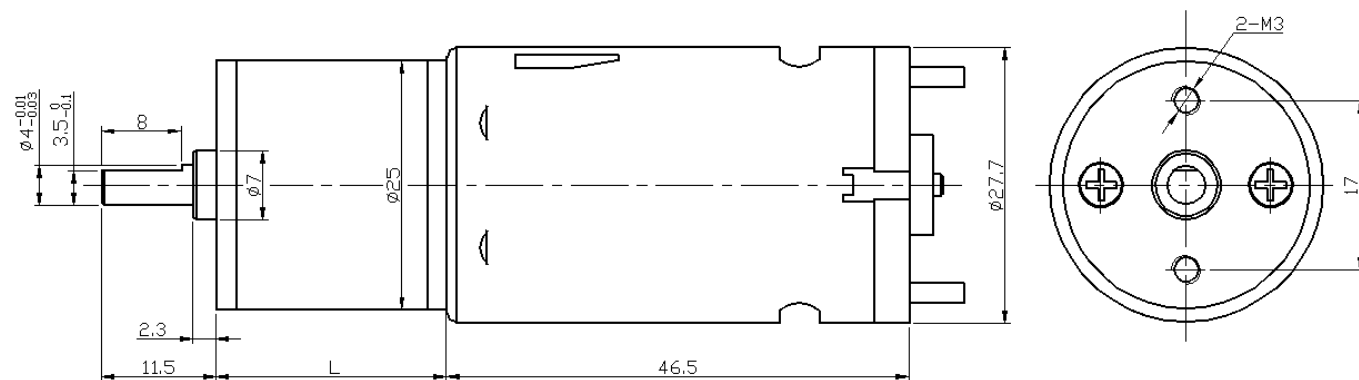

Gearbox Data :

Number of stages	4	5	6	7	8
Reduction ratio	20.4	35.8、45、50	78、99、110 122、127	217、241、268 298、331	478、531、590 656、729
Gearbox length "L"mm	20.8	23.2	25.6	28	29
Breaking torque(kgf.cm)	8	10	12	14	14
Gearbox efficiency	65%	59%	53%	48%	43%

Driving Motor Data :

Motor model	Rated Volt.	No load		Load				Stall	
		Current	Speed	Current	Speed	Torque	Output power	Torque	Current
	V	mA	r/min	mA	r/min	gf.cm	W	gf.cm	mA
WL-395-012-3000	12	≤60	3000	≤250	2200	65	1.5	≥208	≥740
WL-395-012-4500	12	≤90	4500	≤430	3300	80	2.7	≥410	≥1700
WL-395-012-6000	12	≤130	6000	≤750	4800	100	4.9	≥510	≥2800
WL-395-024-3000	24	≤40	3000	≤120	2200	65	1.5	≥220	≥380
WL-395-024-4500	24	≤60	4500	≤220	3300	80	2.7	≥360	≥820
WL-395-024-6000	24	≤80	6000	≤380	4800	100	4.9	≥580	≥1700