





## Geared Motor Data :

电机型号 Motor model	额定电压	空载/No load		负载/Load				堵转/Stall	
	Rated Volt.	电流 Current	转速 Speed	电流 Current	转速 Speed	扭矩 Torque	输出功率 Output power	扭矩 Torque	电流 Current
	V	A	r/min	A	r/min	kgf.cm	W	kgf.cm	A
WL-65SS52000310000-40.5K	3.0	0.42	231.6	1.56	175.5	0.92	1.65	3.78	5.13
WL-65SS52000310000-67.5K	3.0	0.73	131.7	2.11	94.3	2.02	1.95	7.10	5.58
WL-65SS5200123500-225K	12.0	0.02	15.1	0.14	13.3	5.14	0.70	43.35	1.04
WL-65SS5200124500-225K	12.0	0.05	19.8	0.22	16.5	6.96	1.18	41.35	1.03
WL-65SS5200125500-450K	12.0	0.05	12.0	0.23	9.7	10.31	1.03	54.55	1.01
WL-65SS5200128000-135K	12.0	0.24	52.6	0.67	39.3	6.57	2.65	25.90	1.94
WL-65SS52001210000-225K	12.0	0.14	43.2	0.50	33.7	6.81	2.36	30.95	1.77
WL-65SS5200244500-450K	24.0	0.02	9.2	0.08	7.1	7.60	0.56	33.00	0.29
WL-65SS5200245500-450K	24.0	0.04	11.6	0.17	9.0	10.92	1.01	48.77	0.60

## Curve Chart :

Model: WL-65SS5200128000-135K

Model: WL-65SS5200244500-450K

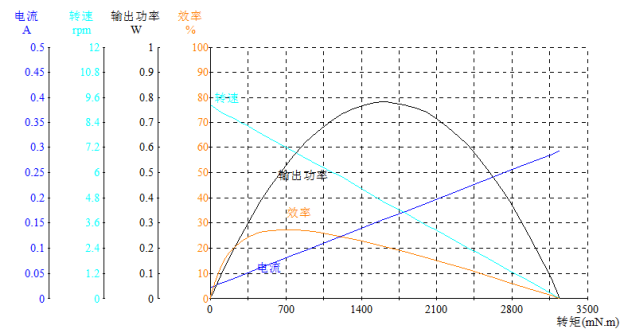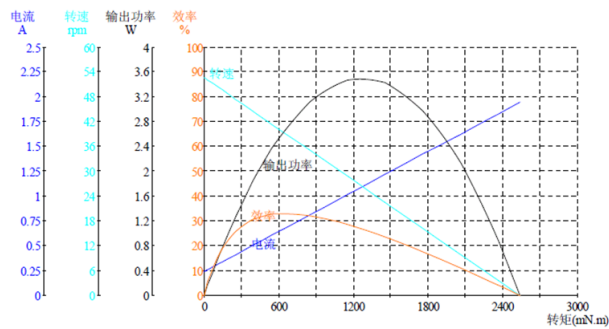

## Remark:

**Gear Motor Torque=Driving motor torque\*Reduction ratio\*Gearbox efficiency;**  
**Gear Motor Speed=Driving motor speed/Reduction ratio**

Motor detailed config can be customized according to customer's requests, like voltage, speed, as well as shaft length and shape...

Welcome OEM or OWL projects