

# WL-180 MICRO DC MOTOR

基本电压/Main Voltage : 6VDC、12VDC、24VDC


典型应用/Typical Applications :

按摩设备、电动玩具、家用电器、电子锁、照相机、CD/DVD播放器、电动剃须刀、自动化产品。

Massage equipments, electronic toys, home appliances, electronic lock, camera, CD/DVD player, electric razor, automatic products.



## APPEARANCE SIZE

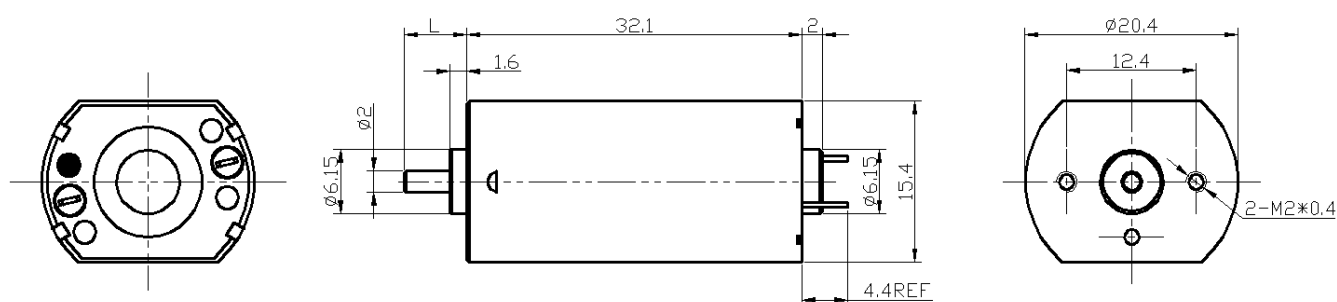


电机参数/ Motor Data :

| 型号<br>Model    | 电压/Voltage              |                | 空载/No load    |             | 负载/Load       |             |              |              | 堵转/Stall     |               |
|----------------|-------------------------|----------------|---------------|-------------|---------------|-------------|--------------|--------------|--------------|---------------|
|                | 电压范围<br>Operating range | 工作电压<br>Normal | 电流<br>Current | 转速<br>Speed | 电流<br>Current | 转速<br>Speed | 扭力<br>Torque | 功率<br>Output | 扭力<br>Torque | 电流<br>Current |
|                | V                       | V              | mA            | r/min       | mA            | r/min       | g.cm         | W            | g.cm         | mA            |
| WL-180PH-2852  | 1.0-3.0                 | 2.4            | 160           | 8300        | 820           | 6900        | 18.0         | 1.27         | 116.0        | 4570          |
| WL-180SH-10320 | 6.0-12.0                | 12.0           | 28            | 6500        | 120           | 5300        | 7.5          | 0.41         | 82.0         | 520           |

曲线图/ Curve Chart :

MODEL: WL-180PH-2852

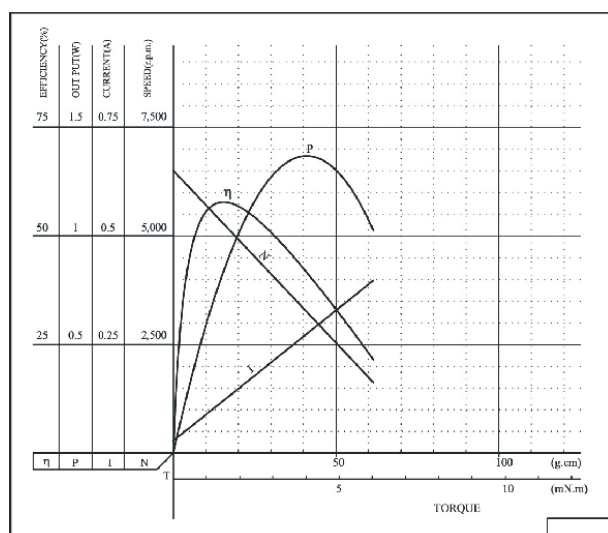

MODEL: WL-180SH-10320

